


ALL NON-CURRENT CARRYING METALLIC PARTS TO BE BONDED  
TO NEUTRAL AND EFFECTIVELY GROUND  
PER NEC



NOTES:

1. 3 WIRE, 240 VOLT, METER SOCKETS AND BREAKER ARE REQUIRED AND SHALL MEET NEC REQUIREMENTS.
2. ALL EQUIPMENT SHALL BE FURNISHED AND INSTALLED BY THE CUSTOMER.
3. COMMERCIAL TEMPORARY METERING SHALL FOLLOW THE COLD SEQUENCING GUIDELINES AND REQUIRE THE INSTALLATION OF FAULT LIMITING DISCONNECTS ON THE LINE SIDE OF THE METER. FUSE SIZE AND TYPE SHALL LIMIT THE FAULT CURRENT TO THE METER HOUSING TO BE 10,000 AMPS OR LESS.
4. ADDRESS MUST BE PROMINENTLY POSTED ON TEMPORARY SERVICE.
5. ACCESS TO TRANSFORMERS ENCLOSURES MUST BE COORDINATED WITH LPC
6. 125 & 250 VOLT RECEPTACLES GFI PROTECTED PER NEC
7. CALL 1-800-922-1987 TO OBTAIN UTILITY LOCATES
8. MAINTAIN CLEARANCES FROM ALL UTILITIES

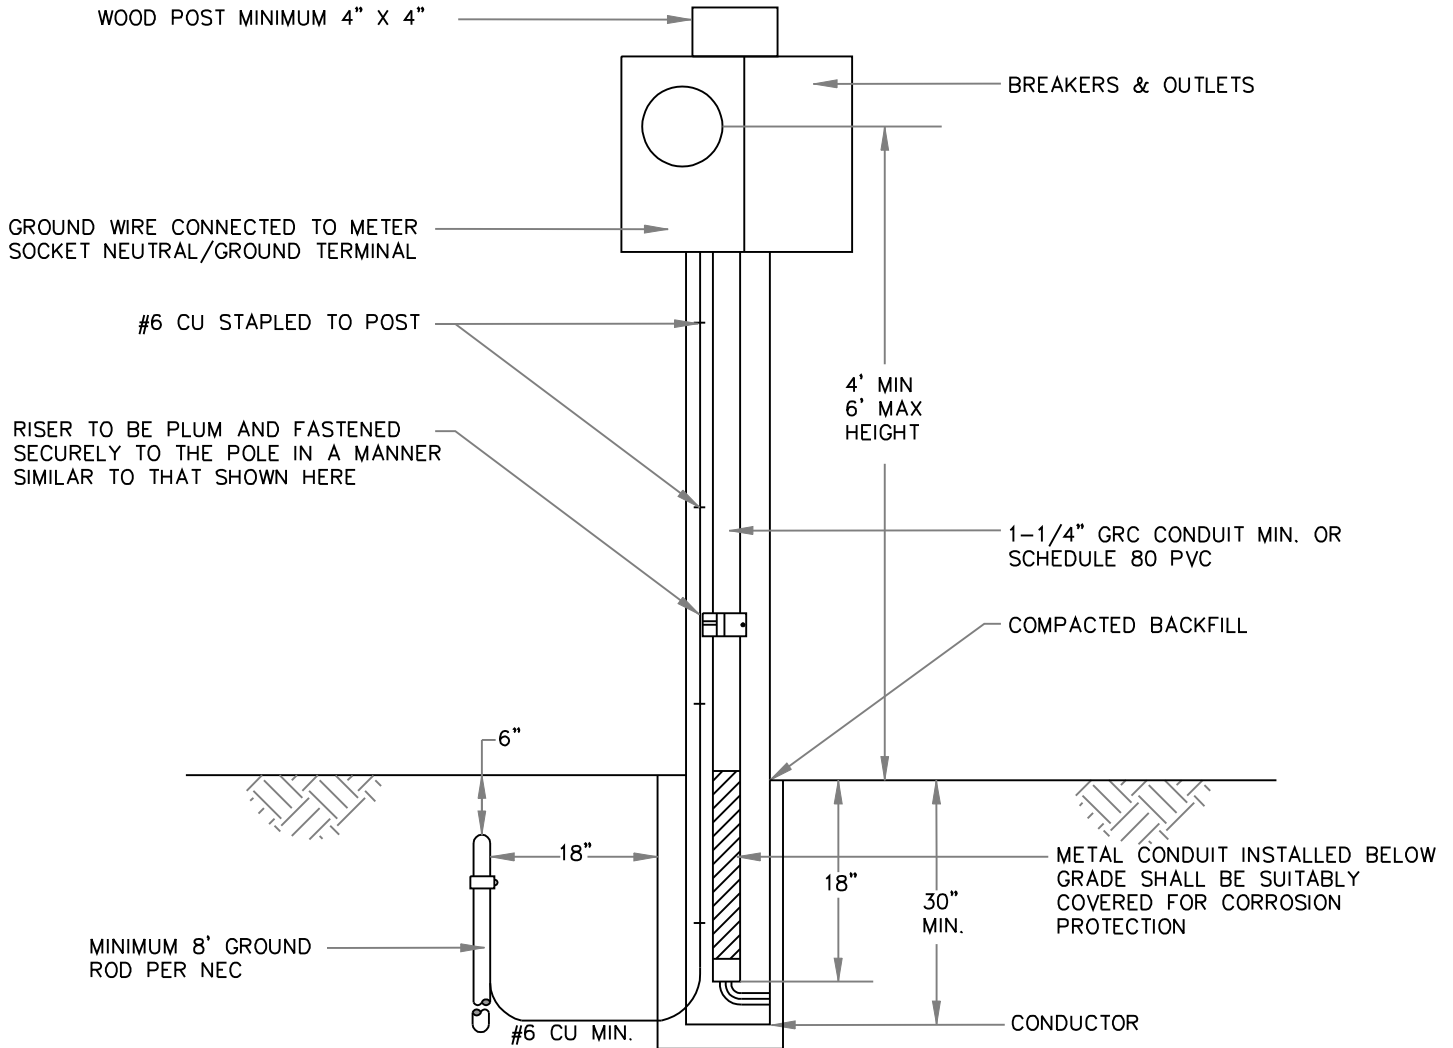

TEMPORARY POWER POST TYPE  
METER INSTALLATION

REV 2

**MTR-2**

SCALE: Not to Scale

POWER & COMMUNICATIONS

DATE: 6/28/05

DRAWN BY: RAWTMF

APPROVAL: